



**ASTM E 1886 and ASTM E 1996
TEST REPORT**

Rendered to:

EAGLE WINDOW & DOOR, INC.

**SERIES/MODEL: Series 02 Clad Axiom Awning with Harbor Master Mono
PRODUCT TYPE: Aluminum Clad Wood Awning Window with Impact Glass**

**Report No.: 95126.03-201-18
Test Dates: 10/23/09
Through: 10/28/09
Report Date: 11/30/09
Test Record Retention Date: 10/23/13**

849 Western Avenue North
St. Paul, MN 55117
phone: 651-636-3835
fax: 651-636-3843
www.archtest.com



ASTM E 1886 and ASTM E 1996 TEST REPORT

Rendered to:

EAGLE WINDOW & DOOR, INC.
2045 Kerper Boulevard
Dubuque, Iowa 52004-1072

Report No.: 95126.03-201-18
Test Dates: 10/23/09
Through: 10/28/09
Report Date: 11/30/09
Test Record Retention Date: 10/23/13

Project Summary: Architectural Testing, Inc. was contracted by Eagle Window & Door, Inc. to perform and validate testing on a Series/Model Series 02 Clad Axiom Awning with Harbor Master Mono, Aluminum Clad Wood Awning Windows with Impact Glass at the Architectural Testing, Inc. test facility in St. Paul, Minnesota. The samples tested met the performance requirements set forth in the referenced test procedures for a +3360/-3840 Pa (+70.0/-80.0 psf) Design Pressure with missile impacts corresponding to Missile Level D and Wind Zone 4. Test specimen description and results are reported herein. The samples were provided by the client.

Test Procedures: The test specimens were evaluated in accordance with the following:

ASTM E 1886-02, Standard Test Method for Performance of Exterior Windows, Curtain Walls, Doors and Storm Shutters Impacted by Missile(s) and Exposed to Cyclic Pressure Differentials.

ASTM E 1996-02, Standard Specification for Performance of Exterior Windows, Glazed Curtain Walls, Doors and Storm Shutters Impacted by Wind Borne Debris in Hurricanes.

ASTM E 1886-05, Standard Test Method for Performance of Exterior Windows, Curtain Walls, Doors and Storm Shutters Impacted by Missile(s) and Exposed to Cyclic Pressure Differentials.

ASTM E 1996-05, Standard Specification for Performance of Exterior Windows, Glazed Curtain Walls, Doors and Storm Shutters Impacted by Wind Borne Debris in Hurricanes.

Test Specimen Description:

Series/Model: Series 02 Clad Axiom Awning with Harbor Master Mono

Product Type: Aluminum Clad Wood Awning Window with Impact Glass

Overall Size: 1219 mm (48") wide by 914 mm (36") high

Test Specimen Description: (Continued)

Sash Size: 1181 mm (46-1/2") wide by 876 mm (34-1/2") high

Daylight Opening Size: 1067 mm (42") wide by 762 mm (30") high

Finish: Exterior aluminum cladding was painted white, interior wood was natural.

Glazing Details: The window utilized a nominal 8.6 mm HarborMaster monolithic laminated glass. The glass was comprised of two nominal 3.1 mm (1/8") annealed sheets separated by a 2.3 mm (0.090") DuPont SGP interlayer. The glass was set from the interior against Instant Glaze II silicone sealant and back-filled with silicone. Wood glazing stops with single-sided adhesive foam tape were utilized on the interior and secured with 1-1/4" brad nails 25 mm (1") from each corner and spaced 152 mm (6") to 203 mm (8") on center.

Weatherstripping:

<u>Description</u>	<u>Quantity</u>	<u>Location</u>
Hollow vinyl bulb	1 Row	Sash stiles and top rail
Foam filled bulb	1 Row	Frame perimeter

Frame Construction: The wood frame was comprised of laminated veneer lumber with corners square-cut, butted, sealed with silicone and secured with two 7/16" x 1-1/2" staples per corner. Extruded aluminum cladding was slip-fit over the wood frame members with the corners miter-cut, sealed with silicone and secured with a nylon corner key and two #6 x 7/16" screws per corner.

Sash Construction: Sash corners utilized mortise-and-tenon construction secured with glue and one #7 x 1-1/4" screw per corner. Extruded aluminum cladding was slip-fit over the wood sash members with the corners miter-cut, sealed with silicone, secured with a nylon corner key and one #5 x 1-1/2" screw per corner.

Hardware:

<u>Description</u>	<u>Quantity</u>	<u>Location</u>
Awning hinges	2	Side jambs
Locks with keepers	2	Jambs; 11-3/4" up from bottom of sash
Roto-operator	1	Midspan of sill
Snubber	3	Head jamb 102 mm (4") from each corner and midspan

Test Specimen Description: (Continued)

Drainage: No drainage was utilized.

Reinforcement: No reinforcement was utilized.

Installation: The unit was installed within a wood test buck and secured steel installation straps. The straps were secured to the units with four #8 x 5/8" screws and to the buck, on the interior and exterior, with two #8 x 1-1/2" screws. The steel installation straps were spaced 152 mm (6") from each corner and midspan on all sides. The unit was sealed to the buck with silicone.

Test Results: The following results have been recorded:

ASTM E 1886, Large Missile Impact

Conditioning Temperature: 21°C (70°F)

Missile Weight: 4173 g (9.2 lbs)

Missile Length: 2362 mm (93")

Muzzle Distance from Test Specimen: 4.9 m (16 ft.)

Test Unit #1

Impact #1: Missile Velocity: 15.4 m/s (50.4 fps); orientation within $\pm 5^\circ$ of horizontal

Impact Area: Center of glazing

Observations: Missile hit target area, no, rips, tears or penetrations

Results: Pass

Impact #2: Missile Velocity: 15.4 m/s (50.5 fps); orientation within $\pm 5^\circ$ of horizontal

Impact Area: Lower right glazing corner

Observations: Missile hit target area, no, rips, tears or penetrations

Results: Pass

Test Unit #2

Impact #1: Missile Velocity: 15.2 m/s (50.0 fps); orientation within $\pm 5^\circ$ of horizontal

Impact Area: Center of glazing

Observations: Missile hit target area, no, rips, tears or penetrations

Results: Pass

Test Results: (Continued)

ASTM E 1886, Large Missile Impact

Test Unit #2 (Continued)

Impact #2: Missile Velocity: 15.1 m/s (49.7 fps); orientation within $\pm 5^\circ$ of horizontal

Impact Area: Upper left glazing corner

Observations: Missile hit target area, no, rips, tears or penetrations

Results: Pass

Test Unit #3

Impact #1: Missile Velocity: 15.0 m/s (49.3 fps); orientation within $\pm 5^\circ$ of horizontal

Impact Area: Center of glazing

Observations: Missile hit target area, no, rips, tears or penetrations

Results: Pass

Impact #2: Missile Velocity: 15.0 m/s (49.1 fps); orientation within $\pm 5^\circ$ of horizontal

Impact Area: Upper right glazing corner

Observations: Missile hit target area, no, rips, tears or penetrations

Results: Pass

Note: See Architectural Testing Sketch #2 for impact locations.

Test Results: (Continued)

ASTM E 1886, *Air Pressure Cycling*

Test Unit #1

Design Pressure: +3360/-3840 Pa (+70.0/-80.0 psf)

POSITIVE PRESSURE

Pressure Range Pa (psf)	Number of Cycles	Average Cycle Time (seconds)	Maximum Deflection at Indicator mm (inch)				
			#1	#2	#3	#4	#5
675 to 1680 (14.0 to 35.0)	3500	1.29	1.3 (0.05)	2.0 (0.08)	2.5 (0.10)	0.3 (0.01)	2.3 (0.09)
0 to 2015 (0 to 42.0)	300	1.43	1.3 (0.05)	2.0 (0.08)	2.5 (0.10)	0.3 (0.01)	2.3 (0.09)
1680 to 2685 (35.0 to 56.0)	600	1.25	1.3 (0.05)	2.0 (0.08)	2.8 (0.11)	0.5 (0.02)	2.5 (0.10)
1010 to 3360 (21.0 to 70.0)	100	1.91	1.3 (0.05)	2.3 (0.09)	3.3 (0.13)	0.5 (0.02)	2.5 (0.10)
			Permanent Set				
			0.3 (0.01)	0.3 (0.01)	0.5 (0.02)	0.3 (0.01)	0.5 (0.02)

NEGATIVE PRESSURE

Pressure Range Pa (psf)	Number of Cycles	Average Cycle Time (seconds)	Maximum Deflection at Indicator mm (inch)				
			#1	#2	#3	#4	#5
1150 to 3840 (24.0 to 80.0)	50	2.35	0.8 (0.03)	2.5 (0.10)	4.3 (0.17)	0.5 (0.02)	22.1 (0.87)
1920 to 3070 (40.0 to 64.0)	1050	1.10	0.8 (0.03)	2.5 (0.10)	4.3 (0.17)	0.5 (0.02)	19.3 (0.76)
0 to 2300 (0 to 48.0)	50	2.20	0.8 (0.03)	1.3 (0.07)	2.8 (0.11)	0.3 (0.01)	15.5 (0.61)
760 to 1920 (16.0 to 40.0)	3350	1.39	0.5 (0.02)	2.0 (0.08)	3.0 (0.12)	0.3 (0.01)	13.7 (0.54)
			Permanent Set				
			<0.3 (<0.01)	0.5 (0.02)	1.5 (0.06)	0.3 (0.01)	4.6 (0.18)

Observations: No additional damage or deglazing was observed.

Result: Pass

Note: See Architectural Testing Sketch #1 for indicator locations. All test specimens were cycled in a common chamber.

Test Results: (Continued)

ASTM E 1886, Air Pressure Cycling

Test Unit #2

Design Pressure: +3360/-3840 Pa (+70.0/-80.0 psf)

POSITIVE PRESSURE

Pressure Range Pa (psf)	Number of Cycles	Average Cycle Time (seconds)	Maximum Deflection at Indicator mm (inch)				
			#1	#2	#3	#4	#5
675 to 1680 (14.0 to 35.0)	3500	1.29	0.8 (0.03)	2.0 (0.08)	3.0 (0.12)	0.3 (0.01)	3.6 (0.14)
0 to 2015 (0 to 42.0)	300	1.43	1.0 (0.04)	2.0 (0.08)	3.0 (0.12)	0.3 (0.01)	3.6 (0.14)
1680 to 2685 (35.0 to 56.0)	600	1.25	1.0 (0.04)	2.5 (0.10)	3.6 (0.14)	0.5 (0.02)	4.1 (0.16)
1010 to 3360 (21.0 to 70.0)	100	1.91	1.0 (0.04)	2.5 (0.10)	3.6 (0.14)	0.5 (0.02)	4.3 (0.17)
Permanent Set							
			0.3 (0.01)	0.8 (0.03)	1.0 (0.04)	<0.3 (<0.01)	1.0 (0.04)

NEGATIVE PRESSURE

Pressure Range Pa (psf)	Number of Cycles	Average Cycle Time (seconds)	Maximum Deflection at Indicator mm (inch)				
			#1	#2	#3	#4	#5
1150 to 3840 (24.0 to 80.0)	50	2.35	1.0 (0.04)	2.5 (0.10)	4.3 (0.17)	0.5 (0.02)	14.7 (0.58)
1920 to 3070 (40.0 to 64.0)	1050	1.10	1.0 (0.04)	2.8 (0.11)	4.3 (0.17)	0.5 (0.02)	13.5 (0.53)
0 to 2300 (0 to 48.0)	50	2.20	0.5 (0.02)	2.0 (0.08)	3.3 (0.13)	0.3 (0.01)	10.9 (0.43)
760 to 1920 (16.0 to 40.0)	3350	1.39	0.5 (0.02)	2.0 (0.08)	3.3 (0.13)	0.3 (0.01)	9.7 (0.38)
Permanent Set							
			0.3 (0.01)	0.8 (0.03)	1.3 (0.05)	<0.3 (<0.01)	2.5 (0.10)

Observations: No additional damage or deglazing was observed.

Result: Pass

Note: See Architectural Testing Sketch #1 for indicator locations. All test specimens were cycled in a common chamber.

Test Results: (Continued)

ASTM E 1886, *Air Pressure Cycling*

Test Unit #3

Design Pressure: +3360/-3840 Pa (+70.0/-80.0 psf)

POSITIVE PRESSURE

Pressure Range Pa (psf)	Number of Cycles	Average Cycle Time (seconds)	Maximum Deflection at Indicator mm (inch)				
			#1	#2	#3	#4	#5
675 to 1680 (14.0 to 35.0)	3500	1.29	0.5 (0.02)	1.3 (0.05)	2.5 (0.10)	0.3 (0.01)	4.6 (0.18)
0 to 2015 (0 to 42.0)	300	1.43	0.5 (0.02)	1.3 (0.05)	1.5 (0.10)	0.3 (0.01)	4.6 (0.18)
1680 to 2685 (35.0 to 56.0)	600	1.25	0.5 (0.02)	1.8 (0.07)	2.8 (0.11)	0.5 (0.02)	4.8 (0.19)
1010 to 3360 (21.0 to 70.0)	100	1.91	0.5 (0.02)	1.8 (0.07)	3.0 (0.12)	0.5 (0.02)	5.1 (0.20)
Permanent Set							
			<0.3 (<0.01)	0.3 (0.01)	0.08 (0.03)	<0.3 (<0.01)	1.8 (0.07)

NEGATIVE PRESSURE

Pressure Range Pa (psf)	Number of Cycles	Average Cycle Time (seconds)	Maximum Deflection at Indicator mm (inch)				
			#1	#2	#3	#4	#5
1150 to 3840 (24.0 to 80.0)	50	2.35	1.0 (0.04)	2.5 (0.10)	4.1 (0.16)	0.5 (0.02)	20.8 (0.82)
1920 to 3070 (40.0 to 64.0)	1050	1.10	1.0 (0.04)	2.3 (0.09)	3.8 (0.15)	0.5 (0.02)	19.0 (0.75)
0 to 2300 (0 to 48.0)	50	2.20	0.8 (0.03)	1.8 (0.07)	3.0 (0.12)	0.3 (0.01)	15.5 (0.61)
760 to 1920 (16.0 to 40.0)	3350	1.39	0.8 (0.03)	1.5 (0.06)	2.8 (0.11)	0.3 (0.01)	14.0 (0.55)
Permanent Set							
			0.3 (0.01)	0.5 (0.02)	1.0 (0.04)	0.3 (0.01)	4.8 (0.19)

Observations: No additional damage or deglazing was observed.

Result: Pass

Note: See Architectural Testing Sketch #1 for indicator locations. All test specimens were cycled in a common chamber.

General Note: Upon completion of testing, the specimens met the requirements of Section 7 of ASTM E 1996.

Test Equipment:

Cannon: Constructed from steel piping utilizing compressed air to propel the missile

Missile: 2x4 Southern Pine

Timing Device: Electronic Beam Type

Cycling Mechanism: Computer controlled centrifugal blower with electronic pressure measuring device

Deflection Measuring Device: Linear transducers

Tape and film were used to seal against air leakage during structural testing. In our opinion, the tape and film did not influence the results of the test.

Drawing Reference: The test specimen drawings have been reviewed by Architectural Testing and are representative of the test specimen reported herein.

List of Official Observers:

<u>Name</u>	<u>Company</u>
Chad Cornell	Eagle Window & Door, Inc.
Jim Welter	Eagle Window & Door, Inc.
Mark D. Lewke	Architectural Testing, Inc.
Jon P. Kasuboski	Architectural Testing, Inc.
Dax R. Stoehr	Architectural Testing, Inc.
Karl A. Lips-Eakins	Architectural Testing, Inc.
Eric J. Schoenthaler	Architectural Testing, Inc.

Detailed drawings, data sheets, representative samples of test specimens, a copy of this report, or other pertinent project documentation will be retained by Architectural Testing, Inc. for a period of four years from the original test date. At the end of this retention period, such materials shall be discarded without notice and the service life of this report will expire.


Results obtained are tested values and were secured by using the designated test methods. This report does not constitute certification of this product nor an opinion or endorsement by this laboratory. It is the exclusive property of the client so named herein and relates only to the specimens tested. This report may not be reproduced, except in full, without the written approval of Architectural Testing, Inc.

For ARCHITECTURAL TESTING, INC.



Digitally Signed by: Eric Schoenthaler

Eric J. Schoenthaler
Project Manager

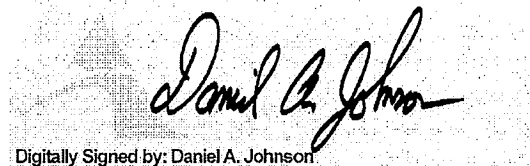

Digitally Signed by: Daniel A. Johnson

Daniel A. Johnson
Director - Regional Operations

EJS/jb

Attachments (pages): This report is complete only when all attachments listed are included.

Appendix-A: WDMA Submittal Forms (2)

Appendix-B: Drawings (17)